

# CONTINUOUS FLOW FROZEN CUSTARD MACHINE


CC303




- Quick-Freeze Technology™ minimizes size of ice crystals to ensure smoother, creamier product.
- Hold cycle keeps barrels at a safe temperature during off-cycle periods.
- Easy to clean design facilitates sanitary operation and ensures product is always fresh.
- Refrigerated hopper with independent temperature control maintains safe storage temperatures in any environment.
- Delrin® food grade plastic blades provide quiet operation and superior durability.
- Highest production model (per barrel) without sacrificing the quality of product.
- Continuous feed system provides high-speed production with low overrun.
- Service panel provides easy access to temperature controls.
- Standard, divided and separated, dipper well keeps scoops and spades clean.
- Optional dual temperature control switch allows for production of various types of frozen treats, such as Italian ice, sorbet, and frozen custard.
- Optional hopper rinse faucet.





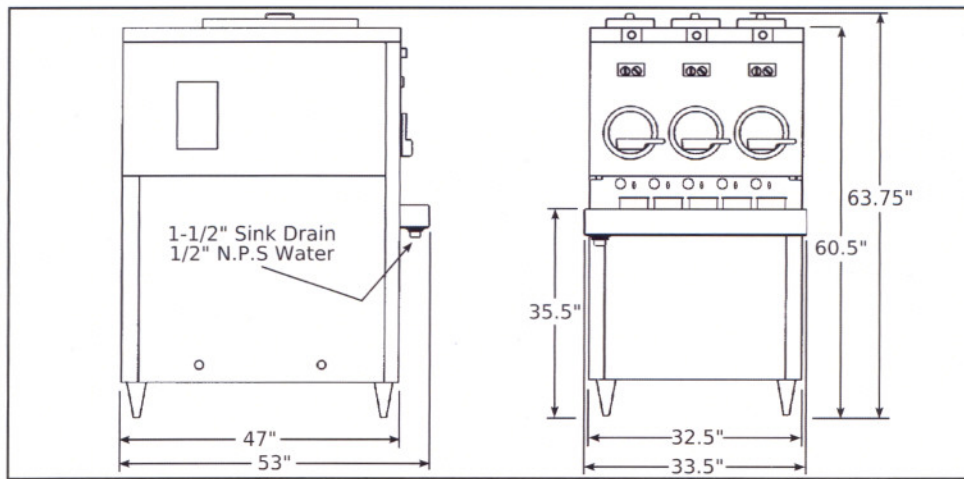

Dimensions	CC303 Air Cooled		CC303 Water Cooled	
	Machine	with crate	Machine	with crate
width	32" (81,3 cm)	44-1/2" (113,0 cm)	32" (81,3 cm)	44-1/2" (113,0 cm)
height	61-1/2" (156,2 cm)	67" (170,2 cm)	61-1/2" (156,2 cm)	67" (170,2 cm)
depth	47" (119,4 cm)	60" (152,4 cm)	47" (119,4 cm)	60" (152,4 cm)
<b>Weight</b>	1280 lbs (580,5 kg)	1580 lbs (716,6 kg)	1730 lbs (784,7 kg)	2030 lbs (920,7 kg)
<b>Electrical</b>	1 Phase, 208-230 VAC, 60Hz		3 Phase, 208-230 VAC, 60Hz	
circuit ampacity (per barrel)	24A minimum		17A minimum	
overcurrent protection device (per barrel)	30A maximum		25A maximum	
<b>Hopper Condensing Unit</b>	1 Phase, 115 VAC, 60Hz NEMA5-15P power cord provided			
<b>Drive Motor</b>	Three - 3 hp			
<b>Cooling</b>	Air cooled units require a remote condensing unit (with compressor) and 24 lbs of R-404A per barrel up to a 50' line set. Add 1 lb of refrigerant for every 10' increase to the line set. Line set not to exceed 100'.		Water cooled units are self contained and require a Standard Hose Adapter water fitting and a 5/8" OD drain fitting for each barrel. They are charged with R-404A.	
<b>Hopper Volume</b>	Three - 7.5 gallon (28,40 liters)			

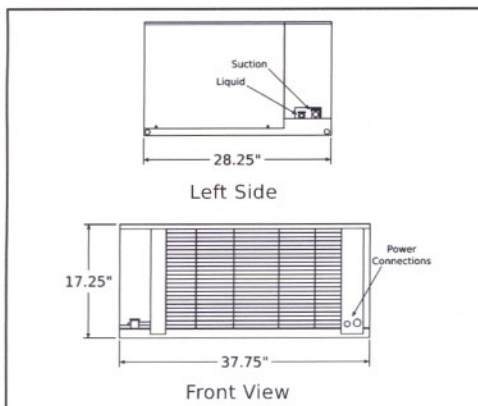

Dimensions	Remote Condensing Unit (1 per barrel)	
	Condenser	
width	37-3/4" (95,9 cm)	
height	17-1/4" (43,7 cm)	
depth	28-1/4" (71,7 cm)	
<b>Weight</b>	222 lbs (100,7 kg)	
<b>Electrical</b>	1 Phase, 208-230 VAC, 60Hz	3 Phase, 208-230 VAC, 60Hz
circuit ampacity	29A minimum	21A minimum
overcurrent protection device	40A maximum	25A maximum
<b>Refrigerated Line Sizes</b>	Liquid Line - 3/8" Suction Line - 7/8"	

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice.

Distributed by:



ISO 9001:2000 Registered

FOODSERVICE EQUIPMENT

502 Highway 67 Kiel, WI 53042-1600

920-894-2293 800-558-5807

Fax: 920-894-7029

E-mail: [foodservice@stoelting.com](mailto:foodservice@stoelting.com)

[www.stoeltingfoodservice.com](http://www.stoeltingfoodservice.com)